

DRIVE TECHNOLOGY

INDIVIDUAL PRODUCT SOLUTION

Please contact us for your individual brake.



Made in Germany

Precision as passion
Certified management systems ISO 9001 and ISO 14001

PRECIMA Magnettechnik GmbH
Röcker Str. 16
D-31675 Bückeburg
Tel.: +49 (0) 5722-89332-0
Fax.: +49 (0) 5722-89332-2
E-Mail: info@precima.de
www.precima.de

2025 - v1.10




EN



FACTS



OPTIONS

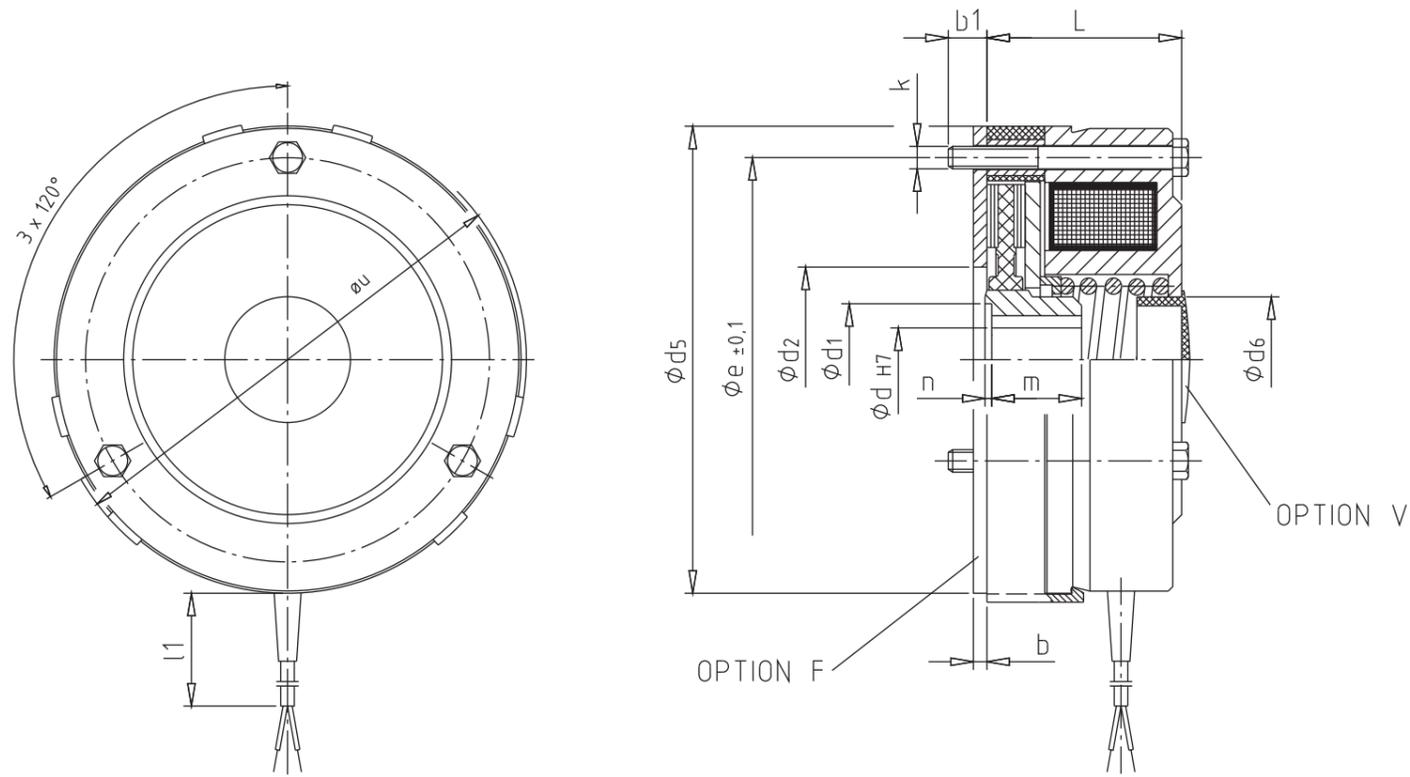

- Cost-effective holding brake
- Ideal for applications with low friction work or low braking torques
- Compact design
- Fail-safe principle with emergency stop function
- Simple and quick installation
- Ambient temperature -20°C up to + 40°C

- Mounting flange
- Sealing cap
- Customized solutions on request



Size **	Nominal braking torque MbN [Nm]	P [W] @ 20°C	b	b1	ød H7	ød1	ød2	ød5	ød6	ød7	øe (±0,1)	k	L	l1	m	n	øu
05	0,25 / 0,5 / 1	10	1,5	5,5	8 / 10	-	25	59	18	85	52	3xM4	30		12	0	62
06	0,5 / 1 / 2	16	1,5	8	8 / 12 / 12*	-	35	69	20	105	60	3xM4	32	400	15	0	73
08	2,5 / 4 / 5	22	3	8,5	10 / 12 / 15	20	40	84	22	130	72	3xM4	38,5		18	1	89

Errors and changes reserved
 Dimensions in mm, standard keyway according to DIN 6885/1 - JS9
 * Keyway according to DIN 6885/3 - JS9
 ** Smaller sizes on request