

Kontaktieren Sie uns gerne für Ihre individuelle Bremse



**Made in Germany** 

## Präzision aus Leidenschaft

Zertifizierte Managementsysteme ISO 9001 und ISO 14001

















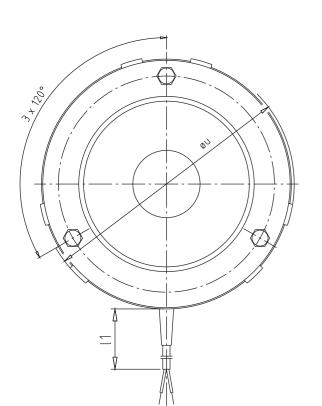


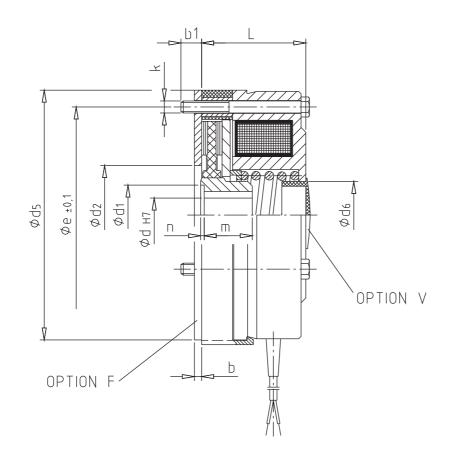

	Nennbremsmoment MbN[Nm]		b	b1	ød H7	ød1	ød2	ød5	ød6	ød7	øe (±0,1)	k	L	11	m	n	øu
05	0,25 / 0,5 / 1	10	1,5	5,5	8/10	-	25	59	18	85	52	3xM4	30		12	0	62
06	0,5/1/2	16	1,5	8	8/12/12*	-	35	69	20	105	60	ЗхМ4	32	400	15	0	73
08	2,5/4/5	22	3	8,5	10 / 12 / 15	20	40	84	22	130	72	ЗхМ4	38,5		18	1	89

Änderungen und Irrtümer vorbehalten Maße in mm, Standard-Passfedernut nach DIN 6885/1 - JS9 \* Passfedernut nach DIN 6885/3 - JS9 \*\* Kleinere Baugrößen auf Anfrage





- Optimal für Anwendungen mit geringer Reibarbeit oder kleinen Bremsmomenten
- Kompakte Bauweise
- Fail-Safe Prinzip mit Notstoppfunktion
- Einfache und schnelle Montage
- Umgebungstemperatur -20°C bis + 40°C



- Anbauflansch
- Verschlusskappe
- Kundenspezifische Ausführungen auf Anfrage



